

## Specifications



### Overall performance

Measurement range		0 to 2 mm	0 to 5 mm	0 to 10 mm
Standard target (Measurement targets)	Material	Iron/cast iron, steel, stainless steel (magnetic/non-magnetic), aluminum/aluminum alloy, copper/copper alloy		
	Shape	Φ27 mm or more Flat T = 5 mm or more	Φ45 mm or more Flat T = 5 mm or more	Φ102 mm or more Flat T = 5 mm or more
Highest resolution	Material	S45C, SS400, SCM440, SUS430	0.4 μm	0.7 μm
		SUS304	0.6 μm	0.9 μm
		A5052, C2801, C1020	0.7 μm	1.2 μm
Linearity *1	Material	S45C, SS400, SCM440, SUS430	typ. ±1.0 % of F.S.	typ. ±1.0 % of F.S.
		SUS304	typ. ±1.5 % of F.S.	typ. ±1.2 % of F.S.
		A5052, C2801, C1020	typ. ±1.8 % of F.S.	typ. ±1.5 % of F.S.
Sensor Temperature Characteristics *2	Material	S45C, SS400, SCM440, SUS430	typ. -0.05 % of F.S./°C	typ. -0.06 % of F.S./°C
		SUS304	typ. -0.06 % of F.S./°C	typ. -0.06 % of F.S./°C
		A5052, C2801, C1020	typ. -0.07 % of F.S./°C	typ. -0.09 % of F.S./°C
Analog output	Displacement output	0 to 5 VDC (output-impedance 100 Ω)		
	Burnout	When up is selected: +6.1 V or more When down is selected: -3.5 V or less		
Frequency response		100 Hz (-3 dB)		
Contact input	For zero shift operation	Non-voltage contact input (ON: 15 ms or more → or more OFF: 15 ms)		
System cable length		3 m (without extension cable) or 10 m (with extension cable)		
Power supply voltage		Within +24 VDC ±10 % (including ripple) Power consumption 0.9 W or less		
Amplifier installation method		35 mm DIN rail (with DIN-rail adapter clip)		

\*1 When ambient temperature is 25 °C.

\*2 When the distance between the detection target (measured object) and the sensor detection surface is 50% of the measurement range at the temperature of between +30 °C to +70 °C.

Specifications are subject to change without notice. Please contact us for the latest information.

### Environmental

	Sensor	Extension cable	Amplifier
Operating temperature range	-10 °C to +70 °C	-10 °C to +70 °C	-10 °C to +50 °C
Operating humidity range	30 % to 85 % RH (non-condensing, non-immersing)	30 % to 85 % RH	30 % to 85 % RH
Degree of protection	IPX7 (excluding connectors)	-	-

Specifications are subject to change without notice. Please contact us for the latest information.

## Ordering Information

### Selections

Set model code ① System cable length 3 m ( Set Contents: Sensor, Amplifier, Spacer set for calibration )

No.	Description	Model code	Items and quantities in set contents					
			Sensor			Amplifier	Extension cable	Spacer set for calibration
			For 0 to 2 mm	For 0 to 5 mm	For 0 to 10 mm	Common use of each range	7 m, common for each range	
1	2 mm range Set	RXT-CL2000	1 unit	-	-	1unit	-	1 / 2 mm 1each
2	5 mm range Set	RXT-CL0500	-	1unit	-	1unit	-	2.5 / 5 mm 1each
3	10 mm range Set	RXT-CL0010	-	-	1unit	1unit	-	5 / 10 mm 1each
4	Multi range Set	RXT-CL2510	1 unit	1unit	1unit	1unit	-	1 / 2 / 2.5 / 5 / 10 mm 1each

Set model code ② System cable length 3 m or 10 m ( Set Contents: Sensor, Amplifier, Extension cable, Spacer set for calibration )

No.	Description	Model code	Items and quantities in set contents					
			Sensor			Amplifier	Extension cable	Spacer set for calibration
			For 0 to 2 mm	For 0 to 5 mm	For 0 to 10 mm	Common use of each range	7 m, common for each range	
1	2 mm range Set	RXT-S2000	1unit	-	-	1unit	1pc.	1 / 2 mm 1each
2	5 mm range Set	RXT-S0500	-	1unit	-	1unit	1pc.	2.5 / 5 mm 1each
3	10 mm range Set	RXT-S0010	-	-	1unit	1unit	1pc.	5 / 10 mm 1each
4	Multi range Set	RXT-S2510	1unit	1unit	1unit	1unit	1pc.	1 / 2 / 2.5 / 5 / 10 mm 1each

### Single unit model code

No.	Description	Specifications	Single unit model code
1	Sensor	0 to 2 mm	RXS-02-M030-03
2		0 to 5 mm	RXS-05-M050-03
3		0 to 10 mm	RXS-10-M050-03
4	Amplifier	Common use of each range	RXC-0
5	Extension cable	7 m, common for each range	RXW-07

### Sales

#### SHINKAWA Electric Co., Ltd.

3rd Fl. Shin-kojijimachi Bldg.3-3 Kojijimachi 4-chome, Chiyoda-ku, Tokyo 102-0083, Japan  
Tel : +81-3-3263-4417 Fax : +81-3-3262-2171 E-mail : InternationalSalesEU@shinkawa.co.jp  
Web : https://www.shinkawa.co.jp/eng/

### Manufacturing

#### SHINKAWA Sensor Technology, Inc.

4-22 Yoshikawa-kogyodanchi, Higashihiroshima, Hiroshima 739-0153, Japan  
Tel : +81-82-429-1118 Fax : +81-82-429-0804 E-mail : info@sst.shinkawa.co.jp  
Web : https://www.shinkawa.co.jp/sst/

\* Specifications, outline drawings and other written information can be changed without notice.

\* When exporting Shinkawa products, permission may be required for export or service transactions, pursuant to the provision of the Foreign Exchange and Foreign Trade Act.

When re-exporting Shinkawa products, permission may be required from the US Department of Commerce, pursuant to the provision of the Export Administration Regulation (EAR). Please contact our service representatives for further information.

\* All company and product names in this brochure are trademarks or registered trademarks.

Published in Aug. 2022

Simple and easy-to-use eddy current type  
non-contact displacement sensor

# Quick RIVERNEW™

Non-Contact  
Displacement Measurement



# Simple and Easy displacement measurement!

## Quick RIVERNEW™

Easy displacement measurement in FA and laboratory (test and research) scenes.

### Simple

#### Useful in a simple instrument configuration.

Sensor types and extension cables can also be shared by one amplifier


- 1 Range free amplifier. Commonly used for any of the 3 measurement ranges of 2 mm, 5 mm or 10 mm.
- 2 Sensor can be chosen from three measuring ranges of 2 mm, 5 mm, 10 mm.
- 3 Extendable length between sensor and amplifier; with the use of 7 m extension cable, overall length can be extended to 10 m.

### Easy

#### Used conveniently according to the purpose.

Only 3 points calibration are required.


- 1 One single amplifier can be used to measure any of the targets materials such as iron, stainless steel, aluminum, copper etc.
- 2 One single amplifier can be used with any of the 3 ranges (2 mm, 5 mm, 10 mm) of sensors.
- 3 One single amplifier can be used for either of (3 m or 10 m) the cable length.

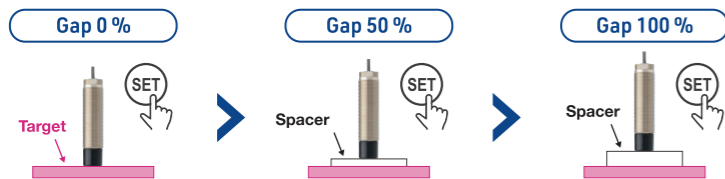

Shinkawa Electric's sensor technologies can be found at;



- Rocket engine fuel pump displacement and vibration sensor
- Magnetic levitation control sensor for linear motor car
- Electric track general test vehicle rail displacement sensor

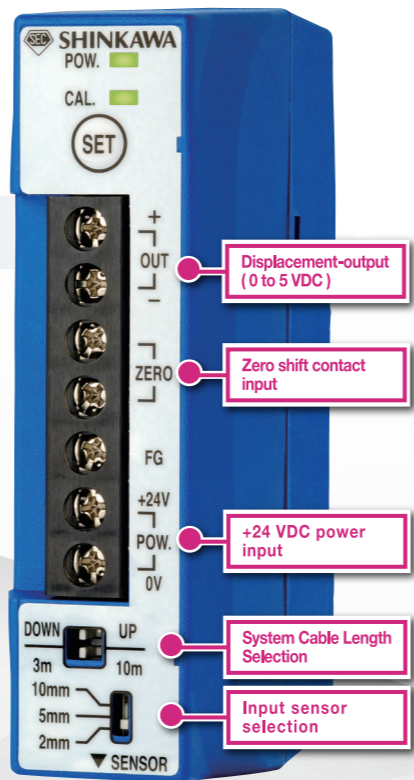

**Amplifier (Mounting : DIN rail)**  
 Sizes : Width 35.4 mm × Depth 65 mm × Height 112.45 mm

#### Non-contact displacement sensor with high environmental resistance

- Eddy current method: Not affected by water, oil, dust etc.
- IP Rating IPX7
- Operating temperature -10 °C to +70 °C


**10 mm range sensor**  
 Sensor top diameter : Φ34 mm  
 Screw size : M16  
 Cable length sensor : 3 m

**5 mm range sensor**  
 Sensor top diameter : Φ14.7 mm  
 Screw size : M16  
 Cable length sensor : 3 m

**2 mm range sensor**  
 Sensor top diameter : Φ8.7 mm  
 Screw size : M10  
 Cable length sensor : 3 m

## System Configurations

One amplifier can calibrate to any of three types of sensors × either of 3 m or 10 m the system cable length

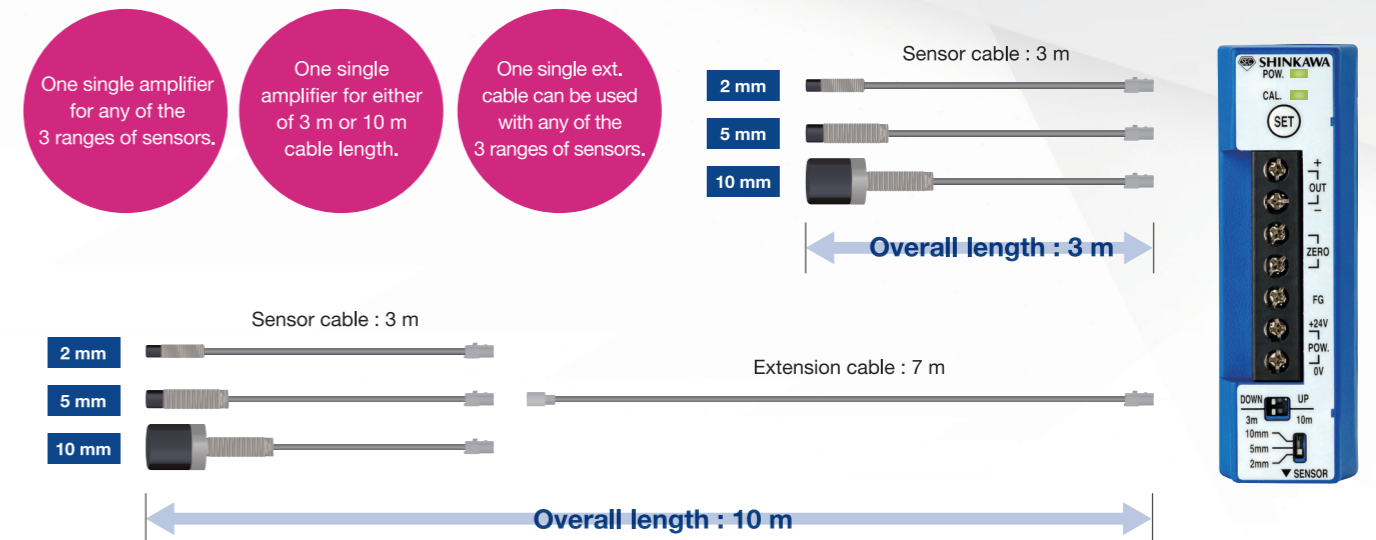

## Application Examples

<p><b>Metallic plate thickness, shape, warpage measurement</b></p>	<p><b>Roll gap, parallelism, thickness measurement and control</b></p>	<p><b>Paint, glue, coating thickness control</b></p>	<p><b>Polishing equipment thickness control</b></p>
<p><b>Dimension measurement, deformation detection, and quantity counting</b></p>	<p><b>Detection of two sheet feeds, detection of presence, and thickness measurement</b></p>	<p><b>Thickness measurement of non-conductive sheets and films</b></p>	<p><b>Centering, shaft misalignment and eccentricity measurement</b></p>
<p><b>Displacement measurement and positioning of grinding wheels and blades</b></p>	<p><b>Displacement measurement of compression tester and tensile tester</b></p>	<p><b>Observation of fruit growth</b></p>	<p><b>Measuring displacement and positioning of machine tools and press machines</b></p>