


Model Code / Additional Spec. Code (No entry if additional spec. code is not specified.)

VM-784B /SU0



\*1 The setup option includes software installation, but excludes creation of OPC communication setting files.

Specification

OVERVIEW

Installation of this software to a PC used as infiSYS View Station will enable trend data and process data communication between the host system, such as DCS and PLC, and View Station via OPC server.

SYSTEM REQUIREMENTS

A computer which satisfies the performance requirements of VM-773B infiSYS Analysis View.  
An available hard disk space of 200 MB or more is required.  
A LAN card is required apart from the ones for communication with monitors or analysis data acquisition units.

INTERFACE SPECIFICATIONS

Network : Ethernet 100Base-TX  
Communication protocol : OPC DA 2.X, 3.0  
Number of servers connected : Up to 4 servers

FUNCTION SPECIFICATIONS

Input

Process data (e.g. temperature data 0 to 200°C) received from the OPC server is stored in the external input channels of VM-773B infiSYS View.

Number of inputs : Up to 480 (including the measurement points of monitors and analysis data acquisition units.)  
Data formats : 4-byte real number  
: 4-byte integer (scalable)  
: 2-byte integer (scalable)  
Receiving interval : 1 sec<sup>-2</sup> minimum  
Setting method : Defined in the OPC communication setting file.

\*2 The interval varies depending on the number of channels.

Output

Sends the trend data, process data and alarm status (DANGER alarm, ALERT alarm, Not-OK status, etc.) of each measurement point that VM-773B infiSYS Analysis View acquired from the monitors and analysis devices to the OPC server.

Data types Trend data, process data (physical quantity)  
: 4-byte real number  
: 4-byte integer (scalable)  
: 2-byte integer (scalable)  
  
Alarm status(Vibration, Process)  
: Logical (False, True)  
: 2-byte integer (0:OK, 1:Alert, 2: Danger)  
  
Sending interval : 1 sec<sup>-3</sup> minimum  
Setting method : Defined in the OPC communication setting file

\*3 The interval varies depending on the number of channels

RECOMMENDED OPC SERVER

DeviceXPlorer OPC Server (by TAKEBISHI)


SOFTWARE SUPPLY

CD-ROM

ACCESSORIES

None

SYSTEM CONFIGURATION

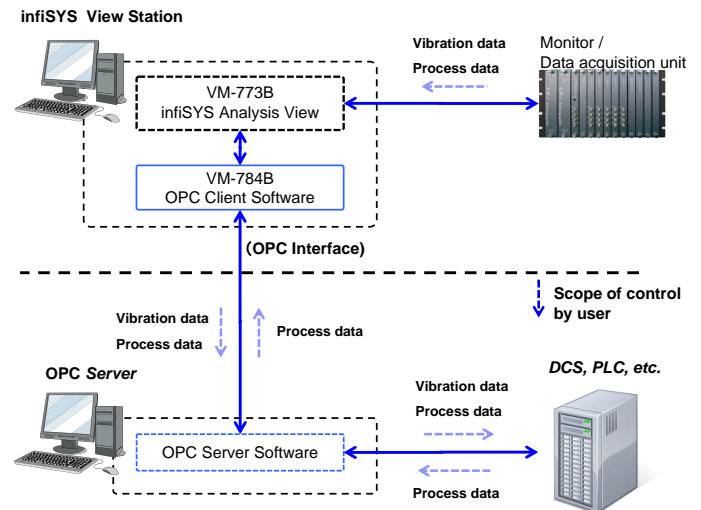

**WARNING**  
Some functions may not be available with old version.  
For details, please refer to "infiSYS Family Improvement Information January 2013" (6H16-011).

Others

VM-773B infiSYS Analysis View is required to use this product.

This application is available only on a computer that has this software installed.

\* The specifications and other items indicated herein are subject to change without notice.  
\* All company and product names in this brochure are trademarks or registered trademarks.