

MARATHON PRODUCTS

The EDL-LN2™

Digital Dual Sensor Thermal Temperature Data Logger for cryogenic industrial and remote monitoring applications.

The EDL-LN2 is a reliable and cost-effective digital temperature recorder for all industrial and commercial applications. The EDL-LN2 has one sensor for ambient range temperatures inside the case, and one external RTD stainless-steel probe that monitors temperatures from -200°C (-328°F) up to +72°C (+161.6°F), ideal for monitoring all of your cryogenic stem cells and biologic materials.




These high-precision laboratory-grade products will operate up to 3 years without a battery change. The LCD display provides real time viewing of ambient and remote temperature prior to downloading to a computer.

The internal software is user programmable and provides the following features: start time delay, sampling intervals, high and low alarm window values, recording status, and measurement data.

All our data loggers have the ability to program alarm limits. Should the temperature reach levels outside these limits, the onboard red LED will light until reset by the user. Operation is as easy as pressing the START button on the recorder.

In conjunction with our MaxiThermal software, you can document your monitoring for your GxP and FDA regulated environment. To download recorded information, simply plug the unit into a PC using a standard USB connector. The USB cable and PC software are available as accessory items.

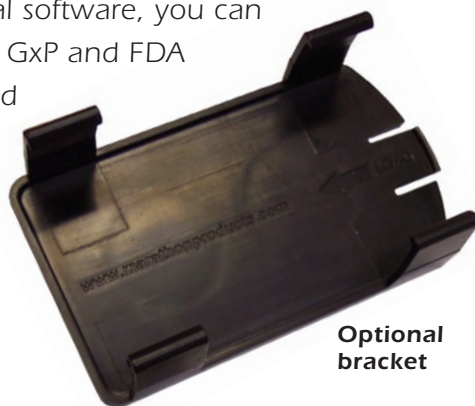

Optional bracket

Temperature Range

Internal Sensor:
-29°C to 72°C

External probe:
-200°C to 72°C

Temperature Accuracy:

(NIST-traceable)
±0.2°C at center of range
±2.0°C at extremes

Memory: 64k

Measurement intervals:

2 seconds to months

Number of measurements:


approx. 64,000 samples

MARATHON
PRODUCTS, INC.



Don't ship without us!®

MaxiThermal Software Highlights: Easy-to-use software provides clear graphs. Report Summary & Statistics File Manager, Note Attachment, Zoom, Elapsed Time or Date/Time View, Recorded View, Celsius or Fahrenheit. Data can be exported to other Windows programs such as spreadsheets, word-processing or databases. Available for Windows 98, NT, 2000, ME, XP, Vista, 7 and 8. An Enterprise Software version and 21CFR Part 11 Compliant Software are available.

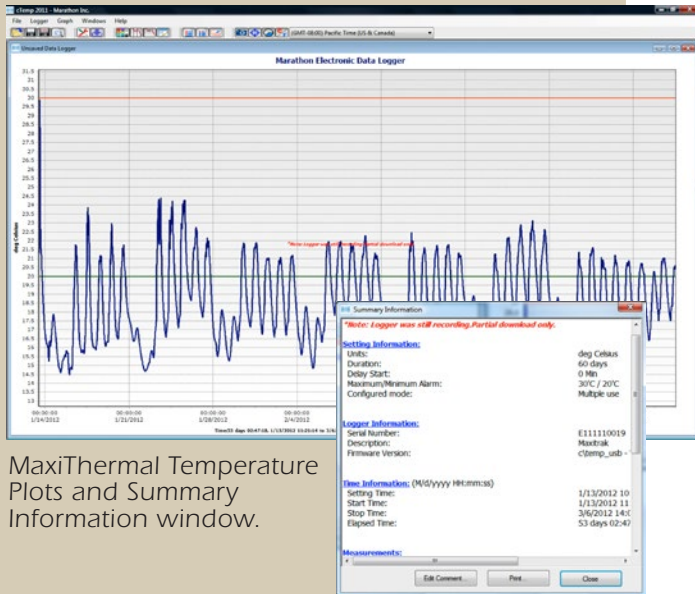

MaxiThermal Temperature Plots and Summary Information window.

Waterproof Enclosure:

The product package is hermetically sealed to an IP66 rating.

Computer Download Capability:

Recorded data can be easily downloaded via standard USB cable and Marathon's software

Calibration:

EDL-LN2 is a laboratory grade multi-use logger with internal NTC and external RTD probe for precision temperature capture. Multi point calibration certificates can be provided for additional costs.

EDL-LN2 Specifications

Internal Sensor: Wired chip in glass thermistor
Operating Range: -29°C to +72°C / -20°F to +161°F
Accuracy: ±0.2°C from 2° to 10°C / ±2.0°C at extremes (NIST-traceable)
 ±0.4°F from 32° to 50°F / ±3.6°F at extremes

External Probe: RTD Stainless Steel Tip = 12 cm / 4.72 in.; Flexible Teflon-coated Cable = 51 cm / 20 in.
Operating Range: -200°C to +72°C / -328°F to +161.6°F
Accuracy: ±0.2°C at 0° to 30°C / ±2.0°C at extremes (NIST-traceable)
 ±0.4°F at 32° to 86°F / ±3.6°F at extremes

Memory EEPROM, Storage: 64k memory (32k per sensor).

No. of Measurements: Approximately 64,000.

Measurement Intervals Programmable from 2 secs per reading.

Examples:
 4 days = 0 min. 06 sec.
 7 days = 0 min. 10 sec.
 16 days = 0 min. 22 sec.
 30 days = 0 min. 40 sec.
 60 days = 1 min. 20 sec.
 90 days = 1 min. 59 sec.
 365 days = 8 min. 02 sec.

Computer Interface: USB port

Power Source: One CR2477 Lithium coin cell battery with a 3 year operating life and a 5 year shelf life.

Size: Length 9.0 cm / 3.5 in. Width 5.0 cm / 2 in. Depth 2.8 cm / 1.1 in.

Weight: 95 grams / 3.3 oz.

CE Certified Yes

Waterproof Yes

PC Software MaxiThermal Software
 21CFR Part 11 Compliant Software

Warranty 3 Months

Optional Accessories: Standard Probe, 3 meter cable with stainless steel tips.
 Custom probes available up to 10 meters.
 NIST Certificate + 1, 2 or 3 Point Calibration
 Mounting bracket



Optional probe.

Please call 1-510-562-6450
 for more information or to place an order.

www.marathonproducts.com

627 McCormick St., San Leandro, CA 94577 ▪ sales@marathonproducts.com

Specifications subject to change without prior notice.