

## VM-5 SERIES OPTIONS

Functions can be upgrade by specifying the following options :


<b>RMS RECTIFIER</b>	Able to measure true effective value.	VM-5K, VM-5U, VM-5B, VM-5M
<b>INSULATE OUTPUT CARD</b>	Insulate from other circuits.	VM-5 series all monitor units
<b>RECORDER OPTION OUTPUT CARD</b>	Applications where an other-than-standard recorder output is required.	VM-5 series all monitor units
<b>TROPICAL SPECIFICATION</b>	Improve durability against humidity.	All VM-5 series
<b>SHIPPING STANDARD (LR)</b>	Applies when products are used for shipping rotating machinery monitors.	VM-5K, VM-5U, VM-5B, VM-5M, VM-5C, VM-5T, VM-5D, VM-5N, VM-5L, VM-5E, VM-5A, VM-5S, VM-5R, VM-5X, VM-5P, VM-5Z5 to 7, VM-5Y1 to 3, VM-5G0, VM-5H4, VM-5W2
<b>CE MARK</b>	Indicates CE mark.	VM-5 series all monitor units, VM-5Y1 to 3, VM-5G1, VM-5P3, VM-5H4, VM-5Z5, VM-5Z7, VM-5W2

## Rotating Machinery Condition Monitor

VM-5 Series

Flexibly adapts to the type and scale of rotating machines.

# VM-5

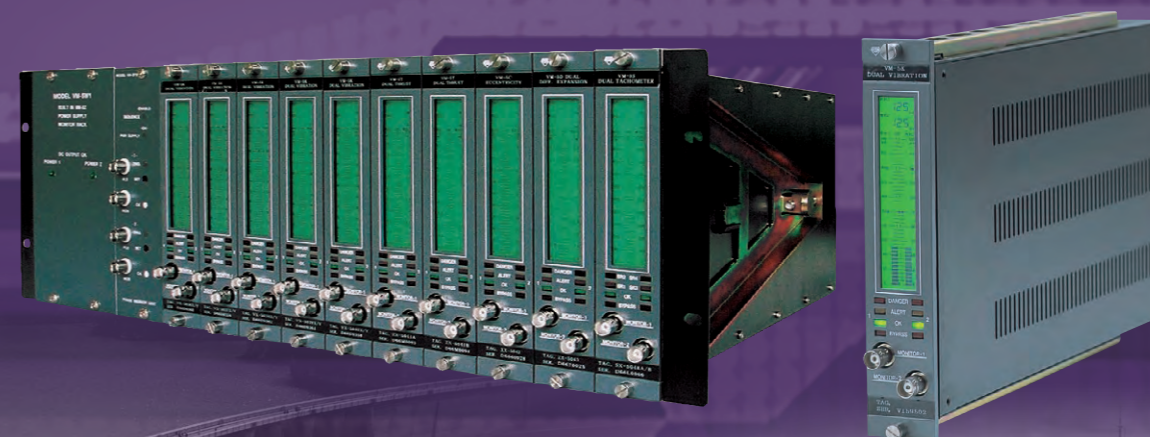

**Sales**  
**SHINKAWA Electric Co., Ltd.**

3rd Fl. Shin-kojimachi Bldg.3-3 Kojimachi 4-chome, Chiyoda-ku, Tokyo 102-0083, Japan  
Tel : +81-3-3263-4417 Fax : +81-3-3262-2171 E-mail : InternationalSalesEU@shinkawa.co.jp  
Web : <https://www.shinkawa.co.jp/eng/>

**Manufacturing**  
**SHINKAWA Sensor Technology, Inc.**

4-22 Yoshikawa-kogyodanchi, Higashihiroshima, Hiroshima 739-0153, Japan  
Tel : +81-82-429-1118 Fax : +81-82-429-0804 E-mail : info@sst.shinkawa.co.jp  
Web : <https://www.shinkawa.co.jp/sst/>

\* Specifications, outline drawings and other written information can be changed without notice.  
\* When exporting Shinkawa products, permission may be required for export or service transactions, pursuant to the provision of the Foreign Exchange and Foreign Trade Act.  
When re-exporting Shinkawa products, permission may be required from the US Department of Commerce, pursuant to the provision of the Export Administration Regulation (EAR).  
Please contact our service representatives for further information.

Published in Sep.2023




# MONITORING SYSTEM FOR ALL ROTATING MACHINERY, FROM LARGE TO SMALL

## VM-5 SERIES MONITOR

The VM-5 Series Monitors are designed in accordance with the American Petroleum Institute (API) Standard 670 for use on rotating machinery. The 8-slot and 10-slot Rack Mounting types, and the Single Unit type with a built-in power supply, are available so that these Monitors can flexibly respond to any system design from medium- and small-scale rotating machinery to TSI (Turbine Supervisory Instrumentation) for generator purpose large turbines. In addition, the designs are user-friendly so that all operations and checks can be performed from the Monitor fronts without stopping operation. They also include all functions necessary for monitoring various variables of rotating machinery from displacement and vibration to zero-speed, thereby enabling any system design corresponding to the machinery type and scale.


### MONITOR FOR TSI, VM-5

The VM-5 Series provides 16 different Monitor units, including vibration, displacement and rotation. Several types of failure detection features are available. Especially for TSI (Turbine Supervisory Instrumentation) and other large rotating machinery, essential items, such as vibration, shaft position, eccentricity and differential expansion are precisely monitored.

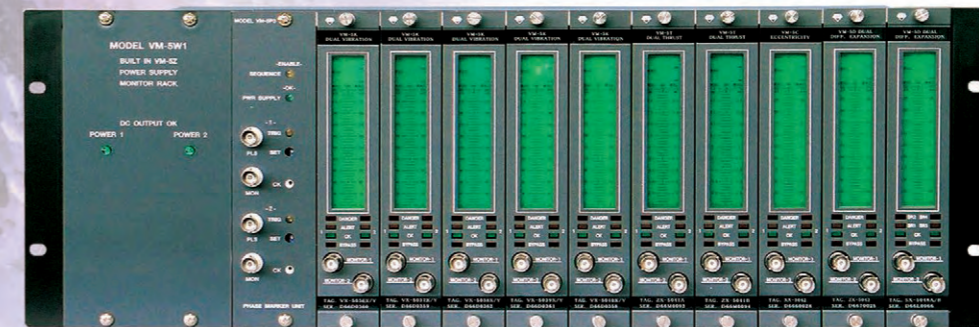

infiSYS RV-200 Vibration Analysis and Diagnostic System and/or Host PC.

VM-5 series Monitor

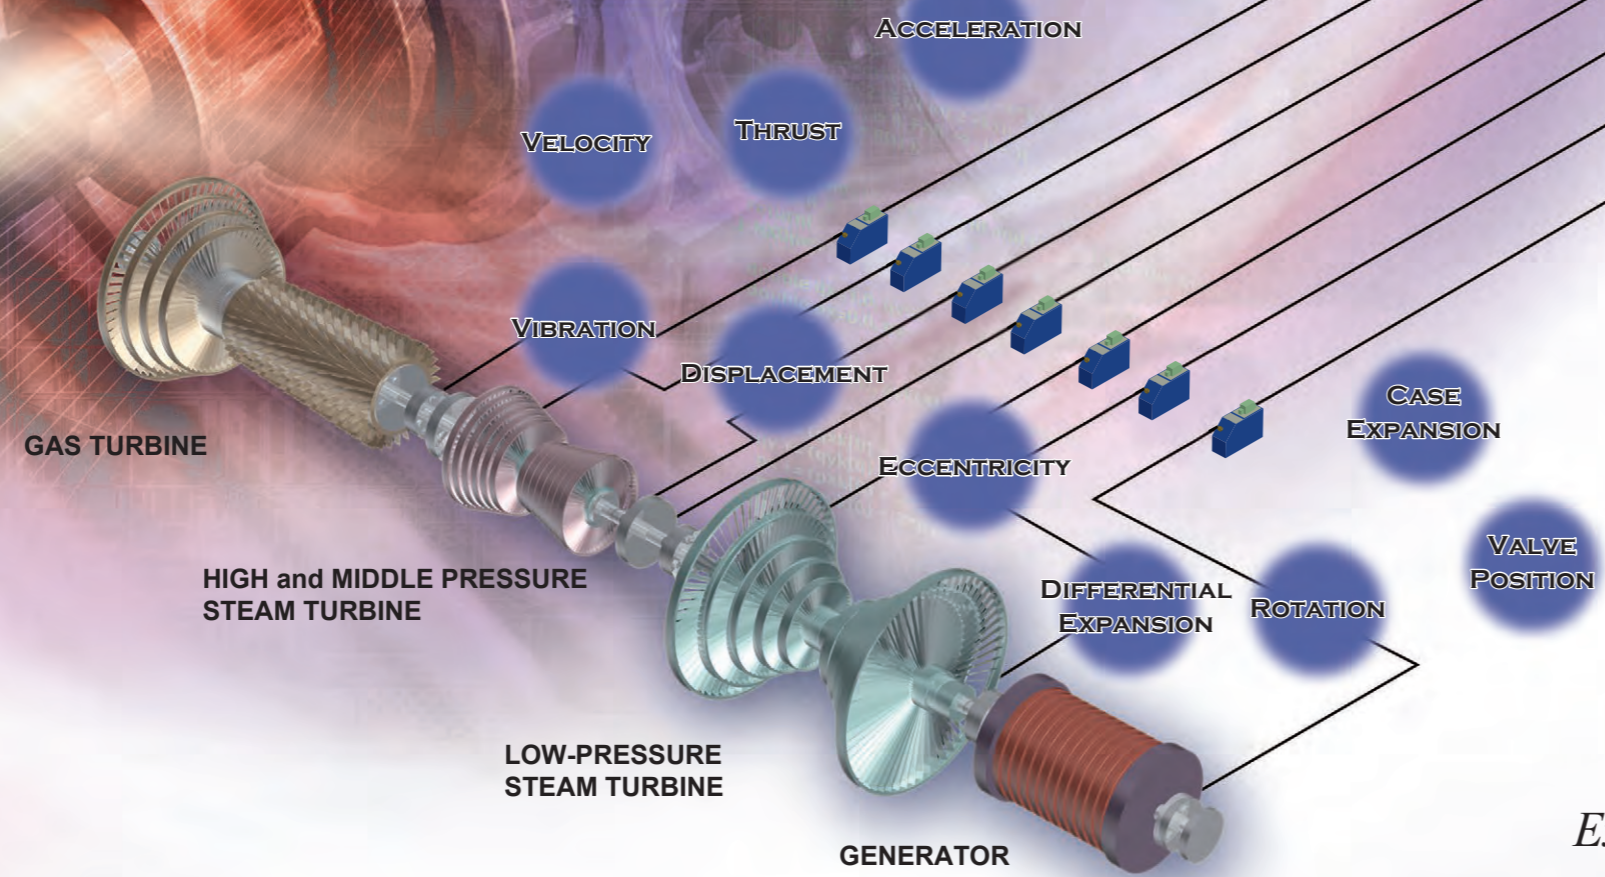

### FLEXIBLE CONFIGURATION

VM-5 consists of the Monitor unit, relay module, power supply unit and instrument rack. The instrument rack is available in Rack Mounting types (VM-5H4, VM-5W2) and Single Unit type (VM-5G). Flexible selection depends upon the size of the target.

### INPUT SENSOR

SHINKAWA transducer products for input for the VM-5 Series have an excellent reputation and high reliability. The specification of each sensor can fit all requests, and stable monitoring conditions are guaranteed.

*Example of TSI for gas turbine combined cycle generator*



# 1 DATA COMMUNICATION

VM-53 Dual Communication Unit, measurement data and status data can be output to PC. Additionally, alarm settings can be done from a PC.


# 2 RELIABLE HIGH QUALITY SYSTEM

In addition, the VM-53 dual communication unit is designed to ensure communication even if one of them has a communication error by duplicating Modbus communication

# 3 ANALYSIS, DIAGNOSIS SYSTEM

Using the infiSYS RV-200 Vibration Analysis and Diagnostic System, detailed diagnosis of rotating machinery failure is possible.


\* For details on the infiSYS RV-200, visit our website.



# Flexible Configuration for All Rotating Machinery

# 4 APPROVALS

For ease of operation in all applications, the VM-5 has acquired and declared various standards such as Shipping Classification and CE Marking Standards.

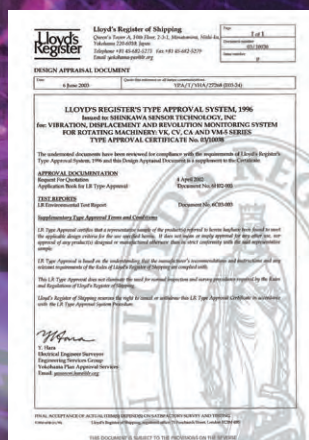

## SHIPPING CLASSIFICATION STANDARD

The Shipping Classification Standard applies when using the VM-5 as an exclusive rotating machine surveillance meter. Approval must be authorized in each country in which the equipment is used.

[LR] = England (Lloyd Standard)

## CE MARKING STANDARD


CE Marking is the mark upon which a pasting duty was imposed when circulating a product in the European market. The mark declares that the target product conforms to the European Community instruction demands.

## System Configuration

The VM-5 Series has two kinds of instrument racks – the Rack Mounting type, VM-5H4 (8-slot) and VM-5W2 (10-slot), and the Single Unit type (VM-5G) with a built-in power supply.

## Installation

With the Rack Mounting type, install Monitor units into the front panel, and related module units into the rear panel. The communication unit and power supply unit are also installed into the rear panel. The Single Unit rack (VM-5G) comes with a preinstalled relay module, so additional module unit installment is unnecessary.

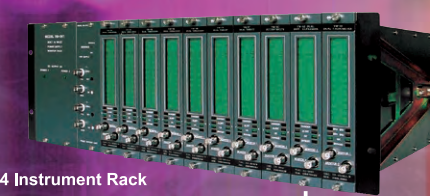

VM-5H4 Instrument Rack  
VM-5W2 Dual Power Supply Instrument Rack




VM-5G Single Unit Instrument Rack

## MONITOR UNIT



- VM-5K Dual Vibration Monitor
- VM-5S Vibration Monitor
- VM-5U Dual Seismic Monitor
- VM-5B Dual Acceleration Monitor
- VM-5M Dual Path Monitor
- VM-5C Eccentricity Monitor
- VM-5T Dual Thrust Monitor
- VM-5D Dual Differential Expansion Monitor
- VM-5N Ramp Differential Expansion Monitor
- VM-5L Complementary Input Differential Expansion Monitor
- VM-5E Dual Case Expansion Monitor
- VM-5A Dual Valve Position Monitor
- VM-5S Dual Tachometer
- VM-5R Tachometer
- VM-51 Rod Drop Monitor
- VM-52 Bottom Hold Monitor

## MODULE UNIT



- VM-5Y Relay Module Unit
- VM-5X Interface Unit
- VM-5P3 Phase marker Unit
- VM-53 Dual Communication Unit
- VM-5Z Power Supply Unit
- VM-5Z0 Power Supply Backup Module Unit


\* Module units cannot be installed in the VM-5G Rack.



# VM-5 SERIES

# MONITOR UNIT

VM-5 Series Monitor units are installed into the front panel of each instrument rack. The LCD display, each display light, and BNC output terminals neatly fit in the slim face panel. (Display styles vary.) Bar graphs and digital measurement value indications are used on the display, and are easily readable. Bar graphs are also used to indicate DANGER and ALERT. These are also shown clearly. When the alarm occurs, each alarm LED is lit, providing easy visual confirmation.

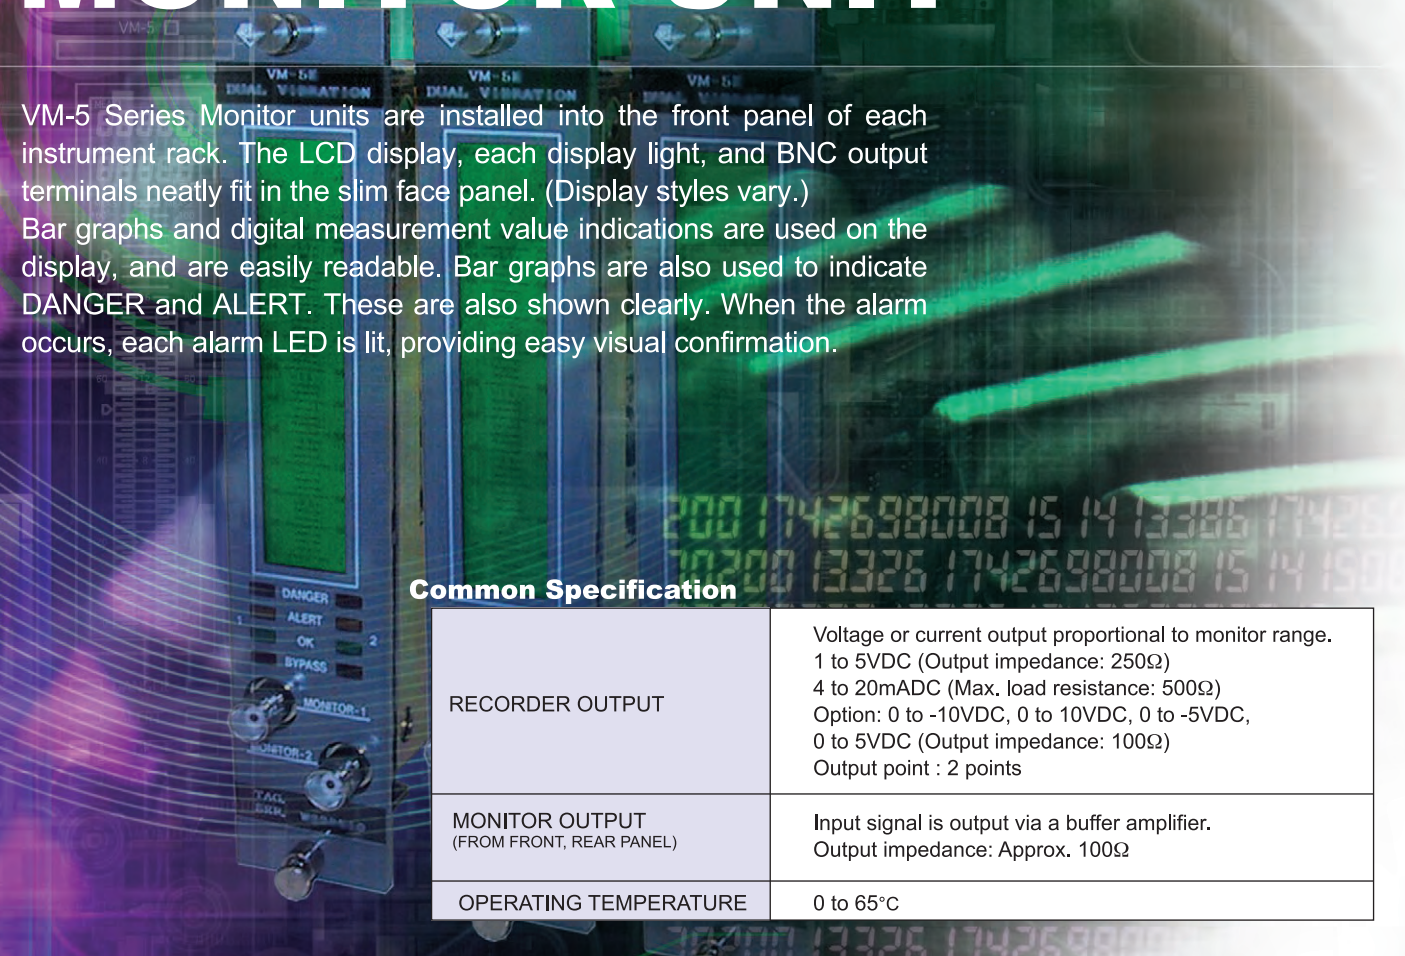

### Common Specification

RECORDER OUTPUT	Voltage or current output proportional to monitor range. 1 to 5VDC (Output impedance: 250Ω) 4 to 20mADC (Max. load resistance: 500Ω) Option: 0 to -10VDC, 0 to 10VDC, 0 to -5VDC, 0 to 5VDC (Output impedance: 100Ω) Output point : 2 points
MONITOR OUTPUT (FROM FRONT, REAR PANEL)	Input signal is output via a buffer amplifier. Output impedance: Approx. 100Ω
OPERATING TEMPERATURE	0 to 65°C



### VM-5 SYSTEM MONITOR UNITS

VIBRATION	VM-5K	Dual Vibration Monitor
	VM-55	Vibration Monitor
	VM-5U	Dual Seismic Monitor
	VM-5B	Dual Acceleration Monitor
	VM-5M	Dual Path Monitor
	VM-5C	Eccentricity Monitor
ECCENTRICITY DISPLACEMENT	VM-5T	Dual Thrust Monitor
	VM-5D	Dual Differential Expansion Monitor
DIFFERENTIAL EXPANSION VALVE POSITION	VM-5N	Ramp Differential Expansion Monitor
	VM-5L	Complementary Input Differential Expansion Monitor
	VM-5E	Dual Case Expansion Monitor
	VM-5A	Dual Valve Position Monitor
	VM-5S	Dual Tachometer
ROTATION	VM-5R	Tachometer
OTHERS	VM-51	Rod Drop Monitor
	VM-52	Bottom Hold Monitor



### VM-5K Dual Vibration Monitor

Inputs signals from the FK Series Vibration Transducers corresponding to 2 channels. Simultaneously provides 2 points of shaft vibration monitoring within one unit.

### VM-55 Vibration Monitor

Simultaneously monitors both relative and absolute vibrations or relative and seismic vibrations.

### VM-5B Dual Acceleration Monitor

Inputs signals from the CA Series Acceleration Transducer corresponding to 2 channels.

### VM-5U Dual Seismic Monitor

Inputs signals from the CV Series Velocity Transducer corresponding to 2 channels.

### VM-5M Dual Path Monitor

Simultaneously monitors the velocity/acceleration and displacement/velocity vibration of rotating machinery detected by CV Series Velocity Transducer or CA Series Acceleration Transducer. Detects machine failures early on and informs the operator of these failures.

	VM-5K Dual Vibration Monitor	VM-55 Vibration Monitor	VM-5U Dual Seismic Monitor	VM-5B Dual Acceleration Monitor	VM-5M Dual Path Monitor
INPUT TRANSDUCER	FK series, VC series	FK series, CV series	CV series	CA series	CV series, CA series
INPUT POINT	2 points				1 point
MONITOR RANGE	0 to 500 μm pk-pk (0 to 15 mils pk-pk)	0 to 800 μm pk-pk (0 to 15 mils pk-pk)	0 to 500 μm pk-pk (0 to 20 mils pk-pk) or 0 to 50 mm/s pk (0 to 2 in/s pk) or 0 to 50 mm/s rms (0 to 2 in/s rms)	0 to 200 m/s² pk (0 to 20 G pk) or 0 to 100 mm/s pk (0 to 2 in/s pk) or 0 to 200 m/s² rms (0 to 20 G rms) or 0 to 100 mm/s rms (0 to 2 in/s rms)	0 to 200 m/s² (0 to 20 G) pk or rms or 0 to 50 mm/s (0 to 2 in/s) pk or rms or 0 to 100 mm/s (0 to 2 in/s) pk or rms or 0 to 500 μm pk-pk (0 to 20 mils pk-pk)
RECORDER OUTPUT CONVERSION ACCURACY	+/- 0.5% of F.S. at 100Hz at 25°C +/- 2.0% of F.S. at 100Hz at 0 to 65°C	+/- 3.0% of F.S. at 100Hz at 25°C +/- 5.0% of F.S. at 100Hz at 0 to 65°C	+/- 0.5% of F.S. at calibration frequency at 25°C +/- 2.0% of F.S. at calibration frequency at 0 to 65°C		
ALARM SET POINT	4 points (DANGER1, ALERT1, DANGER2, ALERT2)				



### VM-5C Eccentricity Monitor

Monitors the shaft deflection (eccentricity pk-pk) of the turbine rotor at machine start-up and turning.

### VM-5T Dual Thrust Monitor

Monitors the shaft position of rotating machinery. Inputs thrust displacement signals from the FK Series Transducers and monitors shaft position.

	VM-5C Eccentricity Monitor	VM-5T Dual Thrust Monitor
INPUT TRANSDUCER	FK series, MS series, VC series	FK series, VC series
INPUT POINT	2 points	
MONITOR RANGE	Monitor range pk-pk : 0 to 1,000 μm pk-pk(0 to 50 mils pk-pk) Monitor range direct : -500 to 0 to +500 μm(- 25 to 0 to +25 mils)	-2.0 to 0 to +2.0 mm(-80 to 0 to +80 mils)
RECORDER OUTPUT CONVERSION ACCURACY	+/- 1.0% of F.S. at 25°C +/- 2.0% of F.S. at 0 to 65°C	+/- 0.5% of F.S. at 25°C +/- 2.0% of F.S. at 0 to 65°C
ALARM SET POINT	Eccentricity pk-pk : 2 points (DANGER1, ALERT1) Direct : 4 points (H-DANGER2, H-ALERT2, L-ALERT2, L-DANGER2)	8 points (H-DANGER1, H-ALERT1, L-ALERT1, L -DANGER1, H-DANGER2, H-ALERT2, L -ALERT2, L-DANGER2)





### VM-5S Dual Tachometer

Monitors the rotor speed of the shaft and zero-speed.

### VM-5R Tachometer

Monitors the rotor speed and rotor acceleration of the shaft, and can set speed comparison values to the rotor velocity or rotor acceleration independently.

	VM-5S Dual Tachometer	VM-5R Tachometer
INPUT TRANSDUCER	FK series, MS series, VC series	FK series, MS series, VC series
INPUT POINT	2 points	1 point
MONITOR RANGE	Up to 99,999rpm	Velocity : Up to 20,000rpm Acceleration : -9,999 to +9,999rpm/min
RECORDER OUTPUT CONVERSION ACCURACY	+/- 0.5% of F.S. at 25°C +/- 2.0% of F.S. at 0 to 65°C	Velocity : +/- 0.5% of F.S. at 25°C +/- 2.0% of F.S. at 0 to 65°C Acceleration : +/- (20rpm/F.S.) x100 +/- 0.5% of F.S. at 25°C +/- (20rpm/F.S.) x100 +/- 2.0% of F.S. at 0 to 65°C
SPEED RELAY SET POINT	4 points (SR1, SR2, SR3, SR4)	4 points (SR1, SR2, SR3, SR4)



### VM-51 Rod Drop Monitor

Monitors the gap between the piston rod set as the target and the sensing surface of the sensor for rod drop measurement (FK) so as to synchronize with the phase marker, and then converts the gap thus measured to the amount of rider ring abrasion.

### VM-52 Bottom Hold Monitor

Monitors the gap between the piston set as the target and the sensing surface of the sensor for rider ring abrasion measurement to obtain the amount of abrasion.

	VM-51 Rod Drop Monitor	VM-52 Bottom Hold Monitor
INPUT TRANSDUCER	FK series	FK-452F
INPUT POINT	2 points	
MONITOR RANGE	0 to 10.0mm	0 to 4.5mm
RECORDER OUTPUT CONVERSION ACCURACY	+/- 1.0% of F.S. at 25°C +/- 2.0% of F.S. at 0 to 65°C	
ALARM RELAY SET POINT	8 points (H-DANGER1, H-ALERT1, L-ALERT1, L-DANGER1, H-DANGER2, H-ALERT2, L-ALERT2, L-DANGER2)	



## DIFFERENTIAL EXPANSION VALVE POSITION

### VM-5D Dual Differential Expansion Monitor

Measures the differential expansion caused by thermal expansion of the rotor and casing. Inputs the expansion of the rotor away from the thrust bearing detected with the FK Series Transducer to measure the differential expansion.

### VM-5N Ramp Differential Expansion Monitor

Measures the differential expansion caused by the thermal expansion of the rotor and casing. Inputs the expansion of the rotor detected by the FK Series Transducers installed on the rotor ramp away from the thrust bearing, then outputs the computed differential expansion, thereby eliminating the measurement error resulting from rotor lifting caused by oil film, etc.

### VM-5L Complementary Input Differential Expansion Monitor

Measures the differential expansion caused by the thermal expansion of the rotor and casing. Receives input from two sensors installed in a complementary arrangement and can measure the differential expansion to twice the sensor range.

### VM-5E Dual Case Expansion Monitor

Inputs the casing expansion signal from the LS Series LVDT Linear Variable Differential Transformer and displays them on LCDs.

### VM-5A Dual Valve Position Monitor

Inputs the valve position signal from the LS Series LVDT linear Variable Differential Transformer and displays them on LCDs.

	VM-5D Dual Differential Expansion Monitor	VM-5N Ramp Differential Expansion Monitor	VM-5L Complementary Input Differential Expansion Monitor
INPUT TRANSDUCER	FK-143F, FK-263F, VC series		
INPUT POINT	2 points		
MONITOR RANGE	-10 to 0 to +10mm (-0.5 to 0 to +0.5inch ) or 0 to 20mm(0 to 1.0inch)	-25 to 0 to +25mm (-1.0 to 0 to +1.0inch ) or 0 to 50mm(0 to 2.0inch)	0 to 75mm (0 to 2.0inch) or -25 to 0 to +25mm (-1.0 to 0 to +1.0inch )
RECORDER OUTPUT CONVERSION ACCURACY	+/- 0.5% of F.S. at 25°C +/- 2.0% of F.S. at 0 to 65°C		
ALARM SET POINT	8 points (H-DANGER1, H-ALERT1, L-ALERT1, L-DANGER1, H-DANGER2, H-ALERT2, L-ALERT2, L-DANGER2)	4 points (H-DANGER, H-ALERT, L-ALERT, L-DANGER)	

	VM-5E Dual Case Differential Monitor	VM-5A Dual Valve Position Monitor
INPUT TRANSDUCER	VM-21P	
INPUT point	2 points	
MONITOR RANGE	0 to 100mm (0 to 4.0inch)	0 to 300mm
RECORDER OUTPUT CONVERSION ACCURACY	+/- 0.5% of F.S. at 25°C +/- 2.0% of F.S. at 0 to 65°C	
ALARM SET POINT	8 points (H-DANGER1, H-ALERT1, L-ALERT1, L-DANGER1, H-DANGER2, H-ALERT2, L-ALERT2, L-DANGER2) In case of differential operation, 4 points (H-DANGER, H-ALERT, L-ALERT, L-DANGER)	8 points (H-DANGER1, H-ALERT1, L-ALERT1, L-DANGER1, H-DANGER2, H-ALERT2, L-ALERT2, L-DANGER2)



# MODULE UNIT


This unit is available in several different styles - Relay, Interface, Communication, Phase Marker, Power Supply unit, etc., and provides high functioning and reliability. To use, install into the front or rear panel of the instrument rack (VM-5H4 Instrument Rack or VM-5W2 Dual Power Supply Instrument Rack).



VM-5 SYSTEM COMBINATION			VM-5G SINGLE UNIT INSTRUMENT RACK	VM-5H4 INSTRUMENT RACK	VM-5W2 DUAL POWER SUPPLY INSTRUMENT RACK	
MONITOR	VIBRATION	VM-5K	Vibration	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
		VM-55	Vibration	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
		VM-5U	Velocity Vibration	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
		VM-5B	Acceleration Velocity	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
		VM-5M	Velocity Acceleration	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	ECCENTRICITY DISPLACEMENT	VM-5C	Eccentricity	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
		VM-5T	Thrust	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	DIFFERENTIAL EXPANSION VALVE POSITION	VM-5D	Differential Expansion	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
		VM-5N	Differential Expansion	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
		VM-5L	Differential Expansion	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
		VM-5E	Expansion	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
		VM-5A	Valve Position	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	ROTATION	VM-5S	Rotation	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
		VM-5R	Rotation	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	OTHERS	VM-51	Rod Drop	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
VM-52		Bottom Hold	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
RELAY		VM-5Y		<input type="checkbox"/>	<input type="checkbox"/>	
INTERFACE		VM-5X		<input type="checkbox"/>	<input type="checkbox"/>	
PHASE MARKER		VM-5P		<input type="checkbox"/>	<input type="checkbox"/>	
COMMUNICATION		VM-53		<input type="checkbox"/>	<input type="checkbox"/>	
POWER SUPPLY		VM-5Z		<input type="checkbox"/>	<input type="checkbox"/>	
		VM-5Z0		<input type="checkbox"/>	<input type="checkbox"/>	

## VM-5Y1,2,3 Relay Module Unit

These units are designed for use with VM-5 Series Monitors. Mounted on the rear panel of the VM-5H4 or VM-5W2 Instrument Rack, they output contact signals such as input abnormal, alert and danger alarms for sequence control. Using 10mm-pitch two column large-sized terminal block, there is no complicated wiring involved.

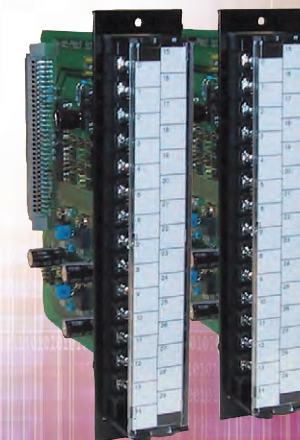

### STANDARD SPECIFICATION

RELAY POINT	4 points (DANGER1, ALERT1, DANGER2, ALERT2) 2 points (DANGER, ALERT) 6 points (DANGER1, ALERT1, DANGER2, ALERT2, OK1, OK2)	CONTACT LIFE	100,000 times or more (rated load)
POWER OUTPUT FOR TRANSDUCER	4mA, 24VDC (Input code : 1) -24VDC, 40mA (Input code 2)	PROTECTIVE CONSTRUCTION	Plastic Seal
CONTACT RATING (Load resistance)	250VAC, 5A 30VDC, 5A	TEMPERATURE RANGE	Operating Temperature : 0 to 65°C Storage Temperature : -30 to +85°C Relative Humidity : 20 to 95%RH (non-condensing)
		MASS	Max. 0.4kg



## VM-5X1,2,3 Interface Unit

Distribute and output the recorder output from the VM-5 Series Monitor Units. They also output analog signals distributed from the VM-5X2,3 Interface Unit I/O module mounted on the rear panel of the VM-5H4 or VM-5W2 Instrument Rack. Using a 10mm-pitch two column large-sized terminal block, there is no complicated wiring (VM-5X2). The VM-5X3 Interface Unit I/O Module (connector type) outputs recorder output from the D-sub connector.

### STANDARD SPECIFICATION (VM-5X1)

INPUT	1 to 5VDC or 4 to 20mADC Input point : 2 points
INPUT IMPEDANCE	1 to 5VDC : Approx. 1MΩ 4 to 20mADC : Approx. 250Ω
OUTPUT	Voltage or current output proportional to input 1 to 5VDC (Output impedance 250Ω) 4 to 20mADC (Max. load resistance : 500Ω) Output point : 8 points (4 output points per 1 input point)
OUTPUT CONVERSION ACCURACY	+/- 0.5% of F.S. at 25°C +/- 2.0% of F.S. at 0 to 65°C
TEMPERATURE RANGE	Operating temperature : 0 to 65°C Storage temperature : -30 to +85°C Relative humidity range : 20 to 95%RH (non-condensing)
MATERIAL & FINISH	Face plate : Aluminum Munsell N-4.0 (equiv.)
MASS	Max. 0.5kg

### (VM-5X2)

TEMPERATURE RANGE	Operating temperature : 0 to 65°C Storage temperature : -30 to +85°C Relative humidity : 20 to 95%RH (non-condensing)
MASS	Max. 0.4kg

### (VM-5X3)

INPUT/OUTPUT CONNECTOR TERMINAL BLOCK	D-Sub 9P connector 1pc CN1 : Recorder output 2 CH x 1 point Terminal block 16pc Input : 2CH Recorder output 2 CH x 3 points
TEMPERATURE RANGE	Operating temperature : 0 to 65°C Storage temperature : -30 to +85°C Relative humidity : 20 to 95%RH (non-condensing)
MASS	Max. 0.4kg


## VM-5P3 Phase Marker Unit

Accommodated in a VM-5H4 or VM-5W2 Instrument Rack, these units process phase marker signals, and provide OK alarm contact output and internal power supply voltage failure detection.

### STANDARD SPECIFICATION

POWER SUPPLY	Supplied from instrument rack (VM-5H4 or VM-5W2)
INPUT TRANSDUCER	FK series
SIGNAL	Phase marker 2ch Max. Output impedance : Approx. 10kΩ
INPUT VOLTAGE RANGE	0 to 25VDC (VM-5P3)
BUFFER OUTPUT	Phase marker signal : 2ch Output impedance : 50Ω
PULSE OUTPUT	Shaped pulse signal is output via a buffer amplifier. Signal level : -1 to +1V (P <sub>L</sub> ), 4 to 6V (P <sub>H</sub> )
TRANSDUCER POWER SUPPLY	-24VDC +/- 1V, 20mA
TEMPERATURE RANGE	Operating temperature : 0 to 65°C Storage temperature : -30 to +85°C Relative humidity : 20 to 95%RH (non-condensing)
MATERIAL AND FINISH	Face plate : Aluminum Munsell N-4.0 (equiv.)
MASS	Unit : Max. 0.6kg

### Ordering Information, Dimension of Target



A= \_\_\_\_\_ mm  
B= \_\_\_\_\_ mm  
C= \_\_\_\_\_ mm  
D= \_\_\_\_\_ mm

CAUTION)  
To detect a projection (gear), provide surface A of the projection with a concentric curve.  
Do not make it flat.

	input	FK-202F	FK-452F
Dimension of target [recommended] (mm)	A	≧6	≧16
	B	≧7	≧20
	C	≧2.5	≧4.5
	D	≧16	≧36
Set gap [recommended] (mm)		1.0~1.5	2.5~3.5

## VM-53 Dual Communication Unit

This unit has two independent serial ports. While inserted in a relay module slot of the VM-5H4 or VM-5W2 Instrument Rack, it collects static data in the rack by the Modbus protocol and then sends it to an external host computer. In addition, as this unit can be daisy chain-connected, it enables data collection from two or more racks.

### STANDARD SPECIFICATION

COMMUNICATION DATA	Measurement value, set gap voltage, OK state, ALERT state, DANGER state, DANGER bypass state, CH bypass state	PROTOCOL	Modbus® AEG Modicon PI-MBUS-300 Reference Manual Uses Remote Terminal Unit (RTU) Transmission mode. Modbus is a registered trademark of Modicon, Inc.
INPUT/OUTPUT CONNECTOR	D-Sub 9P 4 pc (CN1 to CN4)	ID SETTING	Set range 1 to 10 (can be changed with connected PC)
SERIAL INTERFACE	RS-232 or RS-485 (can be changed by internal switch)	TERMINAL SETTING	ON or OFF (can be changed by internal switch)
BAUD RATE	1200,2400,4800,9600,19200 bps (RS-232) 1200,2400,4800,9600,19200,38400 bps (RS-485)	PHASE MARKER OK STATUS	TB (Valid) or FIX (Invalid) (can be changed by internal switch)
DATA LENGTH	7 bit or 8 bit (can be changed with connected PC)	TEMPERATURE RANGE	Operating temperature : 0 to 65°C (without battery) / 0 to 50°C (with battery) Storage temperature : -30 to +85°C (without battery) / -20 to +55°C (with battery) Relative humidity : 20 to 95%RH (non-condensing)
PARITY	ODD (odd number), EVEN (even number), NONE (none) (can be changed with connected PC)	MASS	Max. 0.4kg
STOP BIT	1 bit or 2 bit (can be changed with connected PC)		
FLOW CONTROL	None		

## VM-5Z5,6,7 Power Supply Unit

Provides DC power to each VM-5 Series unit mounted in the same instrument rack. A fault in the power supply is indicated by lighting of the power supply OK lamp and alarm contact output.

### STANDARD SPECIFICATION

ALARM CONTACT OUTPUT	Function : OK Contact capacity (load resistance) : 250VAC, 5A 30VDC, 5A Contact type : C contact / Dry contact	DIELECTRIC STRENGTH	Between power supply and GND : 2000VAC, one minute (VM-5Z5,6) Between power supply and GND : 1500VAC, one minute (VM-5Z7)
RELAY MODE	Normally energized	POWER CONSUMPTION	VM-5Z5 : 265VA or less VM-5Z6 : 135W or less VM-5Z7 : 170W or less
CONTACT LIFE	100,000 times or more (rated load)	TEMPERATURE RANGE	Operating temperature : 0 to 65°C (VM-5Z5,6) / 0 to 50°C (VM-5Z7) Storage temperature : -30 to +85°C Relative humidity : 20 to 95%RH (non-condensing)
PROTECTIVE CONSTRUCTION	Plastic sealed	MATERIAL AND FINISH	Panel : Aluminum Munsell N-1.0 (equiv.)
INSULATION RESISTANCE	Between power supply and GND : 100MΩ or more at 500VDC Between power supply and alarm contact : 100MΩ or more at 500VDC (VM-5Z5,6) Between GND and alarm contact : 100MΩ or more at 500VDC (VM-5Z5,6)	MASS	Max. 2.2kg (VM-5Z5), Max. 3.0kg (VM-5Z6, 7)

## VM-5Z0 Power Supply Backup Module Unit

Backs up the DC power supplied to each VM-5 Series units mounted in the VM-5H4 or VM-5W2 Instrument Rack, at the time of an instantaneous electric power failure.


### STANDARD SPECIFICATION

INSTALLABLE UNIT	This module unit takes up the same space in the VM-5H4 or VM-5W2 instrument rack as two monitor units.	TEMPERATURE RANGE	Operating temperature : 0 to 50°C Storage temperature : -30 to +85°C Relative humidity : 20 to 95%RH (non-condensing)
BACKUP TIME	0.2 sec. at Max. load	MASS	Max. 1.0kg (Face panel excluded)



# VM-5 SERIES INSTRUMENT RACK


The VM-5 Series Instrument Rack is available in 2 different types, the Mounting type and Single Unit type. The Mounting type also has two versions available, the VM-5H4 (Max. 8 monitor units) and the dual power supply VM-5W2 (Max. 10 monitor units).

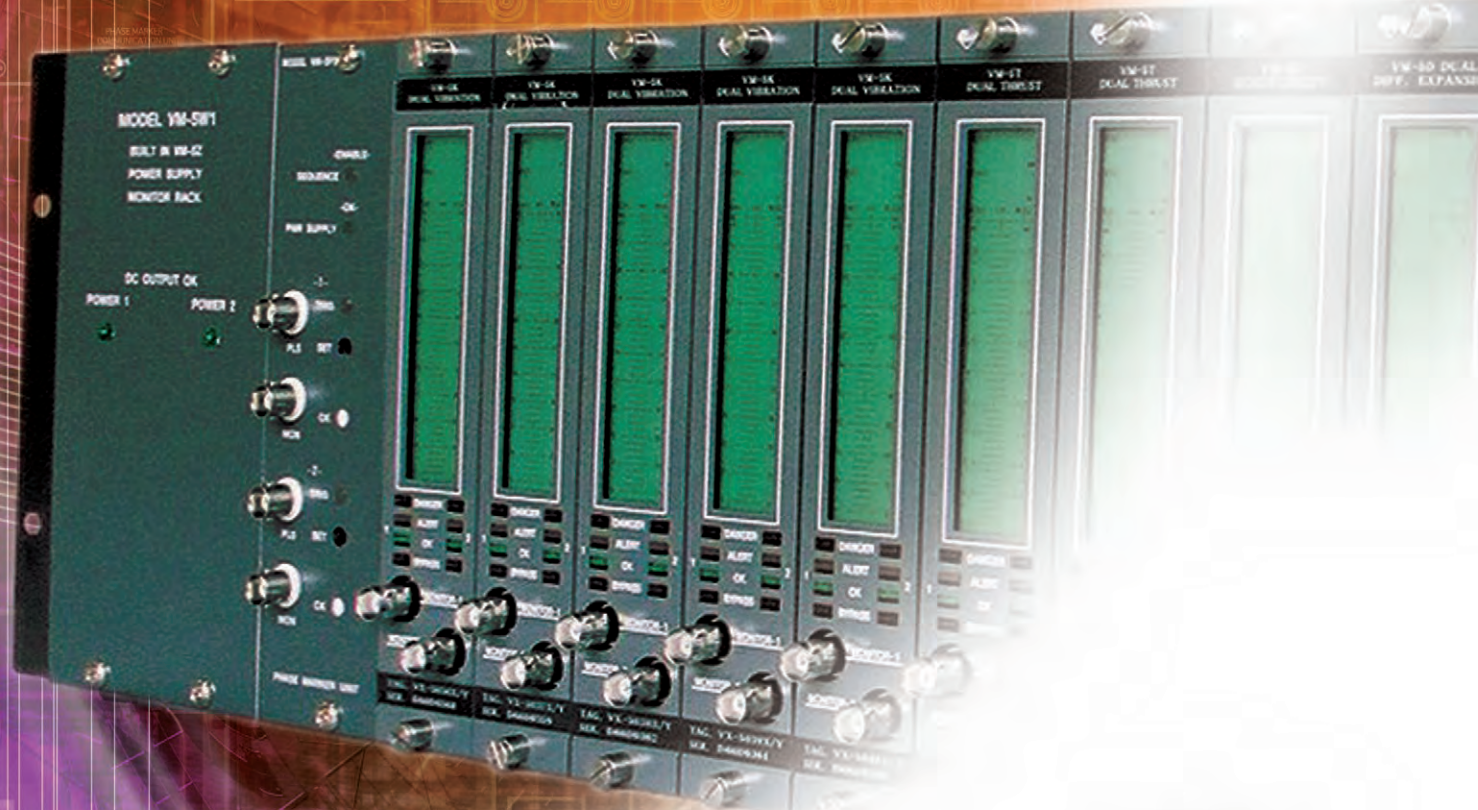

VM-5 SYSTEM COMBINATION		VM-5G SINGLE UNIT INSTRUMENT RACK	VM-5H4 INSTRUMENT RACK	VM-5W2 DUAL POWER SUPPLY INSTRUMENT RACK
MONITOR	VIBRATION	VM-5K Vibration	<input type="checkbox"/>	<input type="checkbox"/>
		VM-55 Vibration	<input type="checkbox"/>	<input type="checkbox"/>
		VM-5U Velocity Vibration	<input type="checkbox"/>	<input type="checkbox"/>
		VM-5B Acceleration Velocity	<input type="checkbox"/>	<input type="checkbox"/>
		VM-5M Velocity Acceleration	<input type="checkbox"/>	<input type="checkbox"/>
	ECCENTRICITY DISPLACEMENT	VM-5C Eccentricity	<input type="checkbox"/>	<input type="checkbox"/>
		VM-5T Thrust	<input type="checkbox"/>	<input type="checkbox"/>
	DIFFERENTIAL EXPANSION VALVE POSITION	VM-5D Differential Expansion	<input type="checkbox"/>	<input type="checkbox"/>
		VM-5N Differential Expansion	<input type="checkbox"/>	<input type="checkbox"/>
		VM-5L Differential Expansion	<input type="checkbox"/>	<input type="checkbox"/>
		VM-5E Expansion	<input type="checkbox"/>	<input type="checkbox"/>
	ROTATION	VM-5A Valve Position	<input type="checkbox"/>	<input type="checkbox"/>
		VM-5S Rotation	<input type="checkbox"/>	<input type="checkbox"/>
	OTHERS	VM-5R Rotation	<input type="checkbox"/>	<input type="checkbox"/>
VM-51 Rod Drop		<input type="checkbox"/>	<input type="checkbox"/>	
	VM-52 Bottom Hold	<input type="checkbox"/>	<input type="checkbox"/>	
RELAY	VM-5Y	<input type="checkbox"/>	<input type="checkbox"/>	
INTERFACE	VM-5X	<input type="checkbox"/>	<input type="checkbox"/>	
PHASE MARKER	VM-5P3	<input type="checkbox"/>	<input type="checkbox"/>	
COMMUNICATION	VM-53	<input type="checkbox"/>	<input type="checkbox"/>	
POWER SUPPLY	VM-5Z	<input type="checkbox"/>	<input type="checkbox"/>	
	VM-5Z0	<input type="checkbox"/>	<input type="checkbox"/>	

## VM-5W2 Dual Power Supply Instrument Rack

Designed to accommodate the VM-5Z Power Supply Unit. The VM-5 Series Monitor and VM-5Y Relay Module Unit mounts on a standard panel. This rack can accommodate one (1) VM-5P Communication/Phase Marker Unit, and up to ten (10) VM-5 Series Monitors with a VM-5Y Relay Module for each unit. A duplex power supply is obtained by mounting two VM-5Z power Supply Unit.

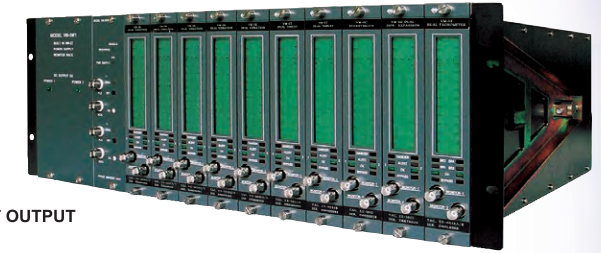

- API STANDARD 670 COMPLIANT
- ALERT AND DANGER ALARM CONTACT OUTPUT
- DUAL POWER SUPPLY
- OK CONTACT OUTPUT

### STANDARD SPECIFICATION

INPUT FOR OPERATION	Alarm reset (normally open) Sequence (normally open) Filter enable (normally open) Contact type : Dry contact	ALARM CONTACT OUTPUT	Function : System OK (common to all channels) Contact capacity : Load resistance : 250VAC, 5A 30VDC, 5A Contact type : C contact, Dry contact
CONTACT LIFE	100,000 times or more (rated load)	TEMPERATURE RANGE	Operating Temperature : 0 to 65°C Relative Humidity : 20 to 95%RH (non-condensing)
PROTECTIVE CONSTRUCTION	Plastic sealed	MASS	Max. 10kg

## VM-5H4 Instrument Rack

Accommodates the VM-5P Communication/Phase Marker Unit and VM-5 Series monitors. This rack can accommodate one (1) VM-5P, and up to eight (8) VM-5 Series Monitors with VM-5Y Relay Module Unit and VM-5Z Power Supply Unit for every unit accommodated.



- API STANDARD 670 COMPLIANT
- ALERT AND DANGER ALARM CONTACT OUTPUT
- OK CONTACT OUTPUT

### STANDARD SPECIFICATION

INPUT FOR OPERATION	Alarm reset (normally open) Sequence (normally open) Filter enable (normally open) Contact type : Dry contact	ALARM CONTACT OUTPUT	Function : System OK (common to all channels) Contact capacity : Load resistance : 250VAC, 5A 30VDC, 5A Contact type : C contact, Dry contact
CONTACT LIFE	100,000 times or more (rated load)	TEMPERATURE RANGE	Operating Temperature : 0 to 65°C Relative Humidity : 20 to 95%RH (non-condensing)
PROTECTIVE CONSTRUCTION	Plastic sealed	MASS	Max. 9kg

## VM-5G0,1,2 Single Unit Instrument Rack

This type of instrument rack consists of a power supply for each VM-5 Series Monitor (except the VM-5P3 Phase Marker Unit and VM-53 Dual Communication Unit), SPDT (DAN. 1, DAN. 2, ALE. 1, ALE. 2) four (4) point relay and OK relay.



- API STANDARD 670 COMPLIANT
- ALERT AND DANGER ALARM CONTACT OUTPUT
- OK CONTACT OUTPUT
- POWER OUTPUT (85 to 264VAC/48 to 64Hz)
- STAND ALONE TYPE RACK

### STANDARD SPECIFICATION

RELAY POINT	5 points (DANGER1, ALERT1, DANGER2, ALERT2, OK)	INSULATION RESISTANCE	Between power supply and GND : 100MΩ or more at 500 VDC Between GND and alarm contact : 100MΩ or more at 500 VDC
CONTACT RATING (Load resistance)	250VAC, 0.2A 30VDC, 2A	DIELECTRIC STRENGTH	Between power supply and GND : 1,500VAC, one minute
CONTACT LIFE	100,000 times or more (rated load)	POWER CONSUMPTION	VM-5G0 : 40VA or less VM-5G1 : 30W or less VM-5G2 : 40W or less
CONTACT METHOD	SPDT (DAN1, DAN2, ALE1, ALE2, OK) 5 points relay	TEMPERATURE RANGE	Operating Temperature : 0 to 65°C Storage Temperature : -30 to +85°C Relative Humidity : 20 to 95%RH (non-condensing)
PROTECTIVE CONSTRUCTION	Plastic sealed	MASS	Rack : Max. 1.8 kg Bezel : Max. 0.2 kg
POWER OUTPUT FOR TRANSDUCER	4mA, 24VDC (Input code : 1) -24VDC, 20mA (Input code : 2) 1CH : -24VDC, 40mA 2CH : -24VDC, 20mA (Input code : 3)		
INPUT FOR OPERATION	Contact for alarm reset (normally open) Contact for sequence (normally open) Contact type : Dry contact		